



TECHNICAL INFORMATION

Input Power:	DC:12V/24V
Body Type:	Aluminium
Operation Temperature:	-25°C to +50°C
Rated Load:	Max 144W/288W
Dimension:	130x65x25mm
Output Current:	4A(each channel)
Remote Distance:	15m/65.6ft


CONTROLLERS

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide extended multi-year warranty on our products, as well as detailed support.

One brand, endless solutions..

SKU: 3312 -

[View more details](#)

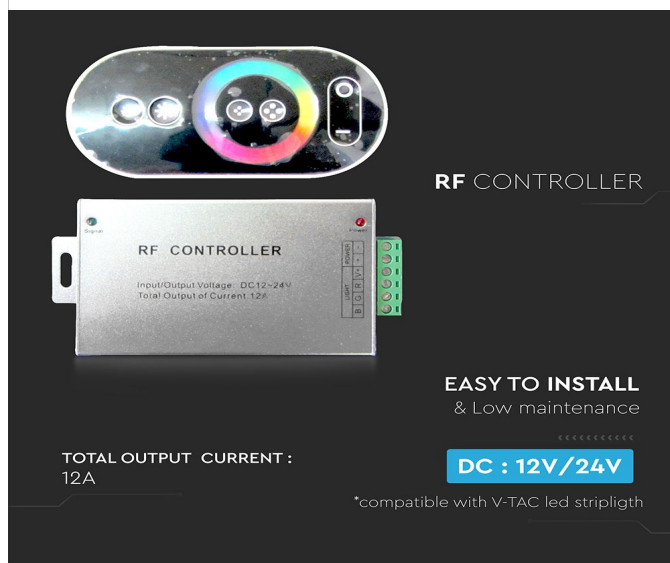

FEATURES

- RF Controller with touch remote control
- Built with 6-key RF touch remote controller
- Maximum current of 4A(each channel)
- Comes with 3 output channels and a common anode connecting mode
- Remote range: 15 m/65.6ft
- Power: 3x AAA battery (Battery not included)
- Compatible with V-TAC LED Striplight



PACKAGING

Gross Weight: 0.25
Unit CBM: 0.00082
Dimension: 130x65x25mm

MASTER BOX PACKAGING

Box Qty: 20
Qty Per Pallet: 3000
Length (Box) mm: 135
Width (Box) mm: 80
Height (Box) mm: 60

LISTING DETAILS

EanCode: 3800230622273